

TECHNICAL CHARACTERISTICS

TBOB2BBTK

Bob





Stool

Welcoming with smooth shapes, the Bob stool is inspired by the peacefulness of nature and the soul of the north to create pleasant, calm spaces, subtle yet contemporary. With its smooth wooden frame, it gives a warm and cozy touch to any space. Available in two different heights.

DESIGNED BY NADIA ARRATIBEL



ondarreta

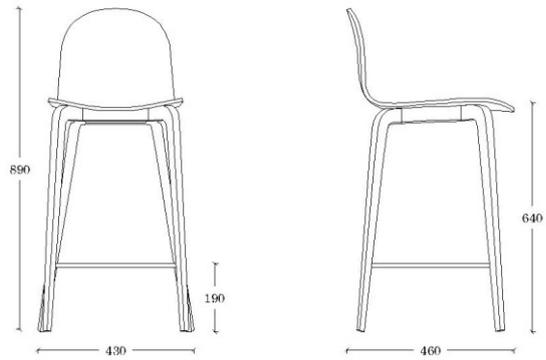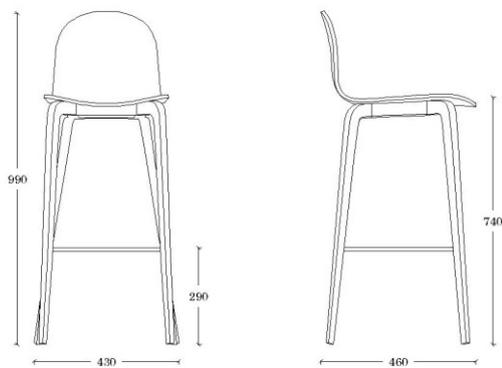

DIMENSIONS

H65: 43 cm x 46 cm x 89 cm x 64 cm x 19 cm (16.9" x 18.1" x 35.03" x 25.2" x 7.5") [width x depth x height x seat height x footrest height]

H75: 43 cm x 46 cm x 99 cm x 74 cm x 29 cm (16.9" x 18.1" x 38.9" x 29.1" x 11.4") [width x depth x height x seat height x footrest height]

WEIGHT

H65: 5,6 kg (12 lb)

H75: 5,8 kg (12 lb)

PACKAGING

H65: 1 chair per box, box dimensions: 62.3 cm x 48 cm x 95.5 cm (24.5" x 18.9" x 37.6")

H75: 1 chair per box, box dimensions: 60,3 cm x 46 cm x 106 cm (23.7" x 18.1" x 41.7")

CERTIFICATION

Product tested under the European standard EN 16139:2013, category of severe use L2.

ACCESORIES

Option felt glides

ORIGIN

100% made in Europe

DESIGN

Nadia Arratibel



COMPONENTS

FRAME

Material

Solid Beech wood bowed with a singular method and CNC machined.

Medium density: 720 kg/m³ (44.9 lb/ft³);

Flex Strength: 1120 kg/cm² (15,900 psi);

Tensile Strength: 1210 kg/cm² (17,200 psi).

Finish

Stained or lacquered

SEAT & BACK

Beech

Beech plywood board shell, 10 mm (0.4") thick. It's made with nine especially treated sheets, glued, pressed and CNC machined.

Fabrics

8 mm (0.31") thick Beech plywood board shell. Medium density polyether stuffing foam.

Beech + Fabric

Two assembled Beech plywood sheets, upholstered front and varnished back (4 and 7 mm thick) (0.16" and 0.27"). Medium density polyether stuffing foam.

Technical characteristics:

Urea-formol glue: low formaldehyde emission (E1 European Normative)

The wood has the PEFC certificate.

Finish

Stained, lacquered or fabric.

FOOTREST

The footrest is made of a 12mm curved cylindrical steel rod, punched and welded with a electrolytic bath finish.

Finish

Nickel & Black Epoxy.

WOOD FINISHES

STAIN

Pigmented enamel with a transparent stain coating. Reactive drying paints: excellent adherence between layers and better mechanical resistance.

Technical Characteristics:

Satisfying UNE EN 71-3 normaative; Formaldehyde free compounds.

LACQUER

Pigmented reactive drying lacquers.

Technical Characteristics:

Satisfying UNE EN 71-3 normative; Formaldehyde free compounds.



COM REQUIREMENTS

Bob Combi: 75 cm (29.5") width/unit.

Bob completely upholstered: 75 cm (29.5") width/unit.